

## Brake Motors




### Description

- Packing equipments
- Conveyor belts
- Washing and bottling machines
- Rolling bridges
- Elevators
- Printing machines
- Gates
- Wood machinery
- Cranes and others

### Features

- ✓ Design 'A' torque for maximum performance – highest break-down torque
- ✓ Three-phase, 60Hz
- ✓ IP55 – water tight and dust tight enclosure
- ✓ Class "F" insulation
- ✓ Service factor: 1.15
- ✓ Continuous Duty (S1)
- ✓ 104°F (40°C) ambient temperature
- ✓ Roller bearings standard on all Crusher Duty model motors
- ✓ Versatile starting methods – capable of wye-delta, across line and part winding (12 leads)
- ✓ Paint: synthetic enamel alkyd resin base (exceeds ASTM B117 salt spray test)

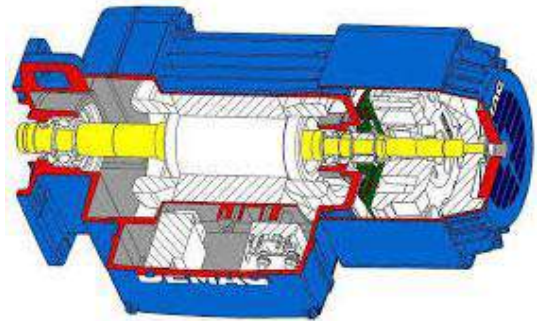

### Available Sizes

Kilowatt	0.4 to 15KW	0.4 to 15KW	0.4 to 15KW
Speed (RPM)	2 Pole	4 Pole	6 pole
Torque	10 to 300Nm	10 to 300Nm	10 to 300Nm