


## Eccentric Butterfly Valve

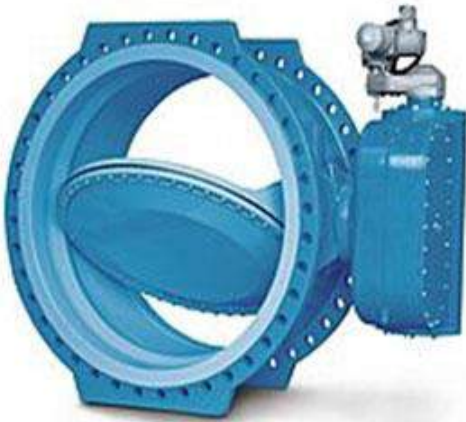

### Description

- **DN** 700 – 3600
- **PN** 6 – 40
- **Body** : EN-JS1030
- **Coating** : Epoxy, Enamel, Rubber lining, Epoxy-Polymer-Ceramic (EPC)
- Tried and tested technology for nominal widths between DN 700 and DN 3600, variants with weight loaded hydraulic actuator available. Drinking water certificate.

### Features

- ✓ Drive shaft and bearing pins in maintenance- free, self-lubricating sleeve bearings
- ✓ Robust wedge connection between drive shaft and tilting disc
- ✓ Easily adjustable and in the open position interchangeable main seal due to profile and clamping ring.