


NEMA ODP Fire Motors

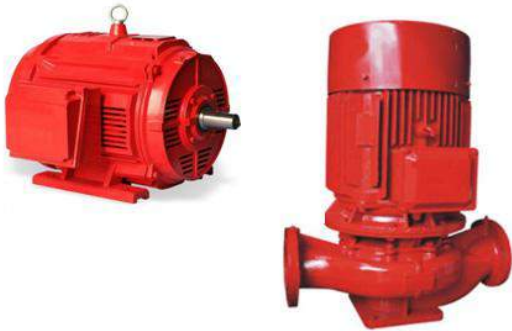

Description

- Three-phase, II & IV pole, 50 or 60 Hz
- Voltage: 380/660 V
- Open drip proof – ODP (IP23)
- Squirrel cage rotor / Aluminum die cast
- V-ring seal on both endshields
- Ball Bearings
- Class “F” insulation for all frames
- Temperature rise: Class “B” (80°C)
- NEMA design “B” ratings
- Service Factor: 1.15
- Continuous duty (S1)
- 104°F (40°C) ambient temperature
- Altitude: 3300ft (1000 m)
- Mounting: F-1 (B3L)
- Paint: Enamel alkyd resin base
- Regreasable bearings, positive pressure lubrication system (frames 254T and up)
- Gasketed conduit box

Application

- ✓ Motor certified for Fire Pump Application