


Direct Acting Float Valves – Bronze

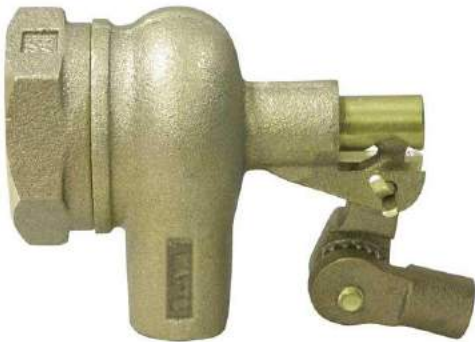

Description

Direct Acting-Bronze Float Valves are used in commercial, industrial, and agricultural applications for controlling water flow. It has a bronze body construction with male NPT threaded end connections on 3/8 to 1 in. (10 to 25mm) models and female NPT inlet-open outlet on 1 1/2 to 2 in. (40 to 50mm) models, cotter pin pivot arm assembly, replaceable seals, and replaceable plungers. This series is ideal for use in air conditioning, refrigeration, and irrigation systems.

Features

- 3/8" through 1" Bronze body with MNPT threaded inlet and outlet
- 1 1/4" through 2" Bronze body with female NPT inlet-open outlet
- Cotter pin pivot arm assembly
- Replaceable plungers

Technical Data

Maximum Pressure	125psi
Maximum Temperature	180°F